



TECHNICAL MANUAL

Cylindrical fuse link EKF

1 DESCRIPTION

Cylindrical fuse links EKF are designed to protect cable lines, household appliances and industrial equipment against overloads and short circuits.

Fuse link: part of the fuse containing fuse elements to be replaced after the fuse has blown.

Cylindrical fuse links correspond to IEC 60269-1:2014.

2 TECHNICAL DATA

The main technical performances are listed in Table 1.

Parameter	Value		
	Cylindrical fuse link 10x38	Cylindrical fuse link 14x51	Cylindrical fuse link 22x58
Rated voltage, V	500		
Rated frequency, Hz	50/60		
Type of cylindrical fuse link	gG		
Rated operating current I_n , A	0,5, 1, 2, 4, 6, 8, 10, 16, 20, 25, 32	2, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63	2, 4, 6, 8, 10, 16, 20, 25, 32, 40, 50, 63, 80, 100, 125
Weight, g	7,7	20,5	58
Rated breaking capacity, kA	50		
Degree of protection	IP20		

3 OVERALL DIMENSIONS

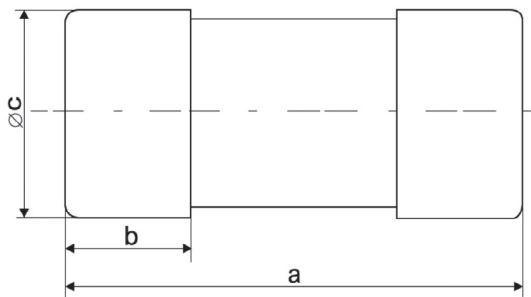


Fig.1 Overall dimensions of cylindrical fuse links

Table 2

Size of cylindrical fuse link	A	B	C
10x38	38	10	10,3
14x51	51	12	14,3
22x58	58	16	22,2

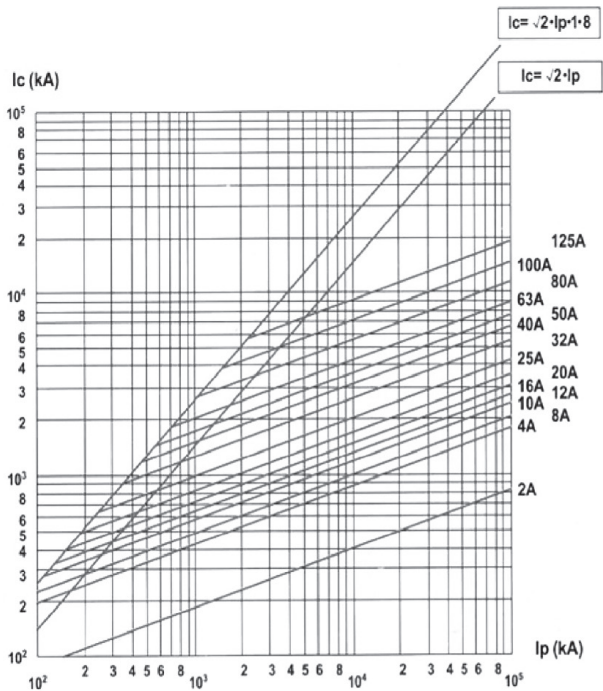


Fig.3 Current limiting characteristics
 I_p - expected short-circuit current,
 I_c - actual breaking current

5 DELIVERY SCOPE

Cylindrical fuse links are supplied in an individual package. For all available documentation, scan the QR-code on the insert or on the inside of the package.

6 SAFETY REQUIREMENTS

Cylindrical fuse links shall be installed and connected only by qualified electrical personnel.

Do not operate cylindrical fuse links with visual mechanical damage.

Disconnect power before installing or replacing the fuse link.

7 MAINTENANCE

For maintenance, follow national safety rules for operation of electrical installations.

8 TRANSPORTATION AND STORAGE

Cylindrical fuse links can be transported by any means of enclosed transport that ensures protection of packed products from mechanical and atmospheric impacts.

Cylindrical fuse links shall be stored indoors in the original package at the ambient temperature from -40°C to $+70^{\circ}\text{C}$ and relative humidity of max. 90% at $+25^{\circ}\text{C}$.

9 DISPOSAL

Life-expired and failed products shall be disposed of in compliance with the national and local laws and regulations in force.

To dispose of the product, send it to an authorized company for recycling in compliance with the national and local laws and regulations in force.

10 MANUFACTURER'S WARRANTY

The manufacturer guarantees that the cylindrical fuse links comply with the requirements of IEC 60269-1:2014, provided that the consumer follows the operation, transportation and storage conditions.

Warranty period: 7 years from the date of sale specified in the sales receipt.

Shelf life: 7 years from the date of manufacture specified on the product package or housing.

Service life: 10 years.

Manufacturer: for information, refer to the product package.

Importer and EKF trademark service representative:

EKF ELECTRICAL SOLUTION – FZCO, Dubai Silicon Oasis,
DDP, Building A2, Dubai, United Arab Emirates.

Importer and EKF trademark service

representative on the territory of the Russian Federation:

000 «Electroresheniya», Otradnaya st., 2b bld. 9, 5th floor,
127273, Moscow, Russia. Tel.: +7 (495) 788-88-15.

Importer and EKF trademark service

representative on the territory of the Republic of Kazakhstan:

TOO «Energoresheniya Kazakhstan», Kazakhstan, Almaty,
Bostandyk district, Turgut Ozal st., 247, apt 4.

11 CERTIFICATE OF ACCEPTANCE

The cylindrical fuse links EKF comply with IEC 60269-1:2014 and have been approved for operation.

Date of manufacture:

For information, refer to the product package.

Technical control stamp



ekfgroup.com

v2