

Product data sheet

Specifications




Cylindrical fuse link (CFL) EKF

IEC 60269-1

| | |
|-------------------------------|--|
| Series name | PVC |
| Product type | Cylindrical fuse link (CFL) |
| Rated voltage [Ue, V] | 500 |
| Frequency [Hz] | 50 / 60 |
| Type of cylindrical fuse link | gG |
| Size | 10 x 38; 14 x 51; 22 x 58 |
| Rated current [In, A] | 0,5; 1; 2; 4; 6; 8; 10; 16; 20; 25; 32; 40; 50; 63; 80; 100; 125 |
| Rated breaking capacity, kA | 50 |
| Degree of protection | IP20 |
| Standard | IEC 60269-1 |
| Warranty period | 7 years |

Overall dimensions:

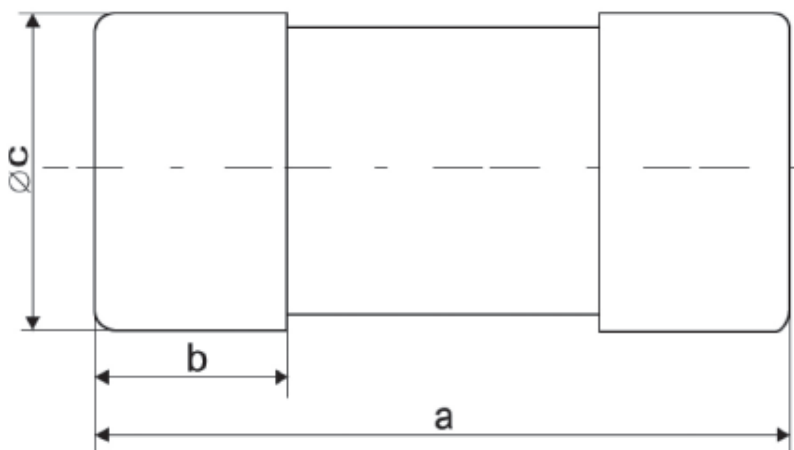

Overall dimensions of cylindrical fuse links

| Size of cylindrical fuse link | A | B | C |
|-------------------------------|----|----|------|
| 10x38 | 38 | 10 | 10,3 |
| 14x51 | 51 | 12 | 14,3 |
| 22x58 | 58 | 16 | 22,2 |