www.global.ekfgroup.com

ENERGY KNOWLEDGE FUTURE

Product data sheet

Specifications



Wall/flush-mounted plastic distribution enclosures IP41 PROXIMA


Product line	PROXIMA
Series name	Wall/flush-mounted plastic distribution enclosures IP41
Device application	Distribution
Product type	Plastic distribution enclosure for modular devices
Rated voltage [Ue, V]	230/400
Frequency [Hz]	50/60
Enclosure mounting	Surface/flush
Number of 18 mm modules per row	3; 4; 6; 8; 10; 12; 15; 18; 24; 36; 45
Installation dimension (mounting space size) [height x width x depth, mm]	Flush-mounted enclosure 3 Flush-mounted enclosure 4 Flush-mounted enclosure 6 Flush-mounted enclosure 8 Flush-mounted enclosure 10 Flush-mounted enclosure 10 Flush-mounted enclosure 12 Flush-mounted enclosure 15 Flush-mounted enclosure 18 Flush-mounted enclosure 18 Flush-mounted enclosure 24 Flush-mounted enclosure 24 Flush-mounted enclosure 36 Flush-mounted enclosure 36 Flush-mounted enclosure 45 Flush-mounted enclosure 45
Rated current [In, A]	63 A
Electrical insulation class	Class II Double insulation

www.global.ekfgroup.com

ENERGY KNOWLEDGE FUTURE


Type of front cover	Smoked
Degree of protection	IP41
Operating temperatures [°C]	-25 +55
Type of rail	DIN rail
Enclosure material Housing	Self-extinguishing polymer
IK degree of protection	IK07
Color	White
Warranty period	7 years


Overall dimensions (wall-mounted type):

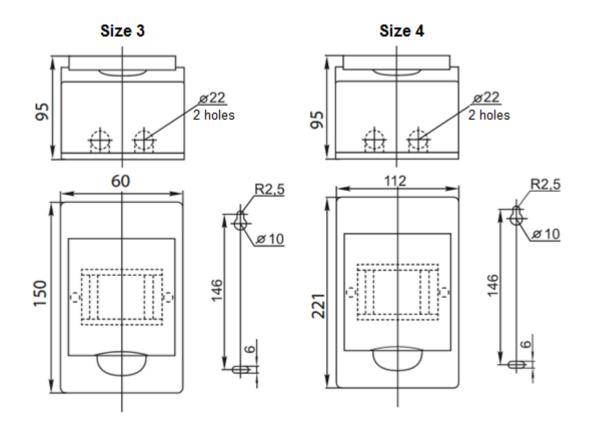




www.global.ekfgroup.com

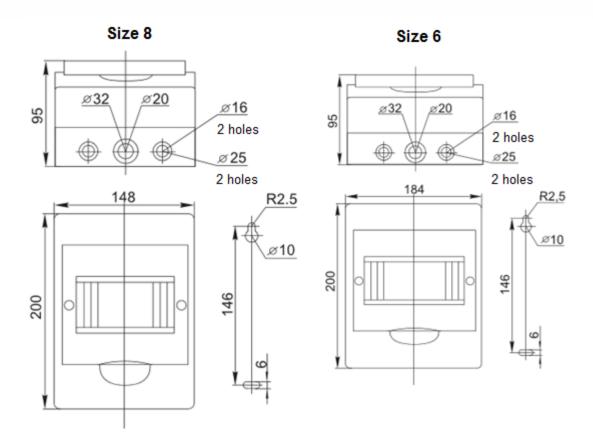

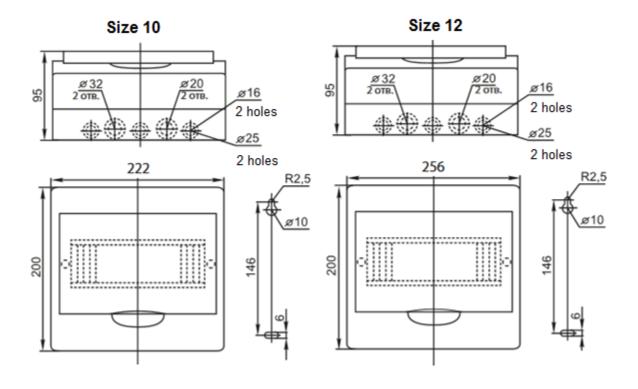




www.global.ekfgroup.com

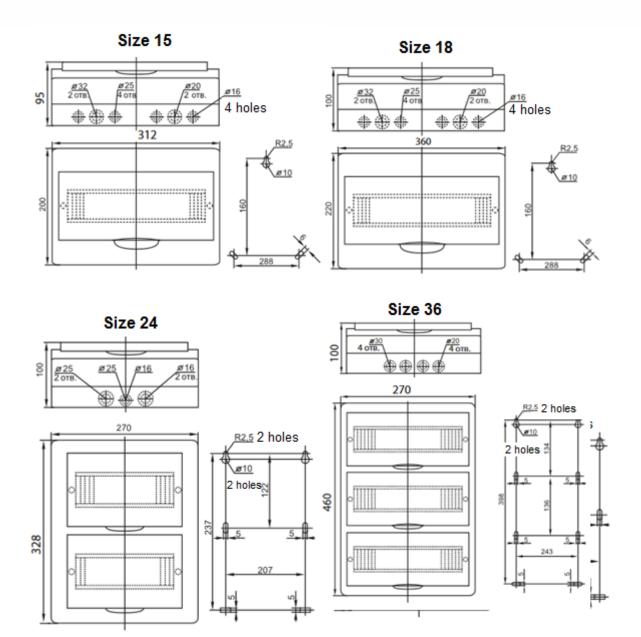


www.global.ekfgroup.com

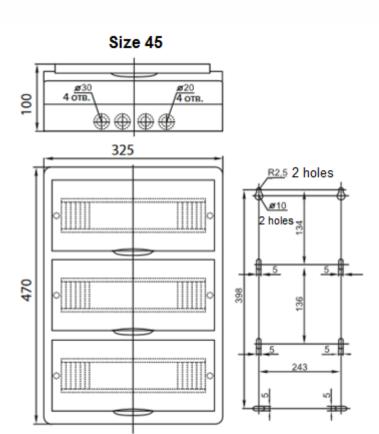



www.global.ekfgroup.com

ENERGY KNOWLEDGE FUTURE

Overall dimensions (flush-mounted type):

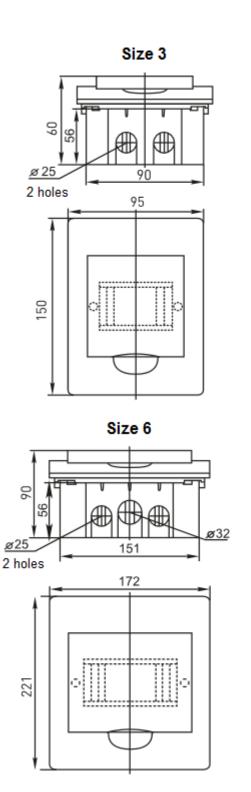


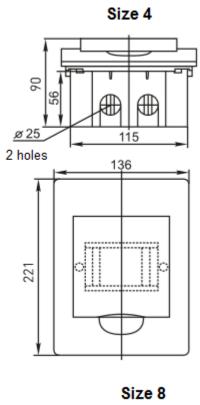





www.global.ekfgroup.com

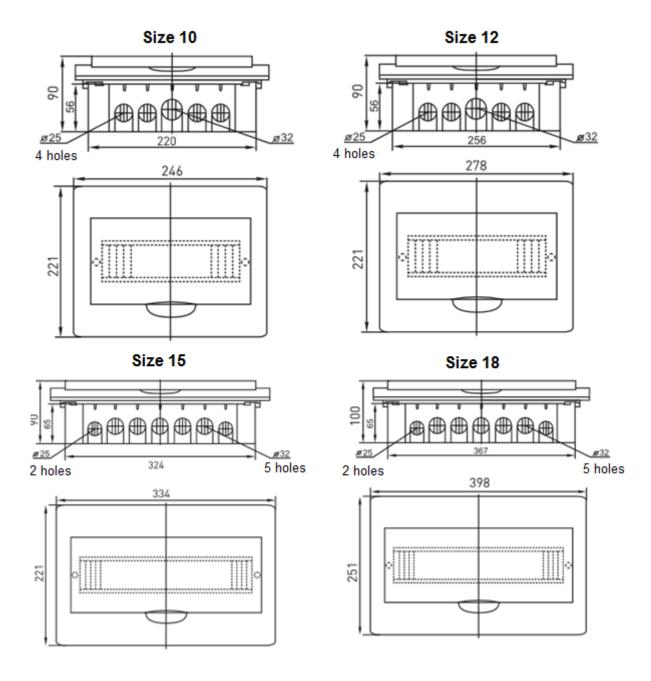



www.global.ekfgroup.com

